

Prescriptive Application for STABILIGRID



Customer Name: _____
Customer Phone: _____
Email: _____
Physical Address: _____


Type and Location of Specific Installation (*roadway or drive, permanent or overflow parking, grass or gravel, etc.*):

A typical, properly installed STABILIGRID System for roadways/traffic areas:

- (1) remove mud or other debris until a stable sub-surface is exposed,
- (2) grade sub-surface evenly and with a slight slope away from the area, if possible
- (3) place a minimum of 1" of 5/8" crushed gravel in the area. Spread evenly, then roll the area with a landscape drum roller or vibrating plate tamper
- (4) starting at one end or side, place STABILIGRID product in place and interlock them by lining them up and gently stepping on them to lock them together.
- (5) fill StabiliGrid with 5/8" crushed gravel and lightly compact using the landscape drum roller or plate tamper

Application recommended for this project:

- Base Preparation:(1) _____
- _____
- (2) _____
- (3) _____
- (4) Grid Installation: _____
- _____
- (5) Grid Fill: _____
- (6) Footing / Bedding: _____

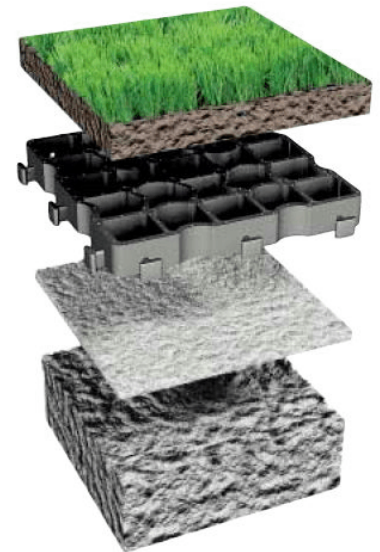

Notes or Comments:

Customer Acknowledgment

I understand the proper installation requirements for my specific STABILIGRID installation.

Customer Name: _____

Signature: _____

Date: This ____ Day of the month _____, 20__

Eco-Terr Representative

Name: _____

Signature: _____

Phone: _____

email: _____