



Manufacturer's Fact Sheet Farm & AG

Branded as **VersiGrid™L/D1.0 grade** in the USA and Canada

Product Name:

Made in the USA

Product Description:

self-connecting grid tiles: 12" x 12" x 1" tall (30.48 x 30.48 x 2.54 cm) made of durable elastic high-pressure recycled plastic.



The grid tiles are resistant to fracture (flexible from -58 to +194 F, -50 to +90 C) resistant to UV and freezing

Resistant to ammonia, most acids, street salt, gasoline, and petroleum products
100% recycled plastic content/recyclable content.

VersiGrid™L/D1.0 is safe to use around ground water and plants

Suggested Applications and usages:

Equine Applications

- Horse stables, paddocks, arenas
- Turnouts and riding paths
- Race tracks
- Side yards at homes
- Slope retention for hillsides and erosion control
- Livestock wash areas
- Stall Floors.
- Drainage culverts and ditches
- Dog kennels and runs
- Grassy Park public areas



Cattle and Dairy Applications

- Feedlot footing
- Pasture management (prevention of nutrient runoff into surface waterways)
- Exercise/turnout areas
- Pervious confinement pen flooring
- Traffic paths through pastures (prevents soil compaction/mud creation)
- Trailing and loadout areas



Other Applications

- Loading zones
- Drainage culverts and ditches
- Slope retention and erosion control
- Pervious Parking - green grass parking lots
- Pervious Parking - natural crushed gravel roadways and driveways.
- Grass Reinforcement - prevention of damage to root structures from traffic

Installation:

VersiGrid™L/D1.0 may be "cut to fit" at the installation site quickly and free of problems, pre-cutting is not required. **VersiGrid™L/D1.0** may be cut with an angle grinder or circular saw, for small jobs with the com pass saw or handsaw and the like.

refer also to:

- Commercial/business information
- Demonstrations and examples**
- Non-agricultural applications
- Brochures, etc... » www.ecoterr.com

Technical Information: * According to current state of knowledge without claim to completeness.



VersiGrid™/L/D1.0

Dimensions: 12" x 12" x 1" inches tall
(30.48 x 30.48 x 2.54 cm)

Cell width: 2.2 inches avg.

Porosity: 86% Open


Wall thickness I/O: .15 / .20 inches

Weight: 1 lb ea (0.45 kg ea)

Compressive Strength: more than 12 US t/ft² (120t/m²)

Load bearing capacity: 25 tons/axle (23 mt/axle)

Standard color: black



The following typical, generic information is provided for illustration purposes only.

Material: 100% recycled plastic, proprietary blend [<5% pigment, Anti-UV, carrier agents, etc.

The following are

provided only as concepts and guidelines.

These are not provided as specific installation instructions. Please request information concerning your project ...

- Colorant: Coloring by means of 1-3% pigment, UV-Stabilized
- Stability of shape: Temperatures from -58 to +194 F (-50 - +90 C)
- Change of Shape: <0.5% (at median temperature +68 to +176 F)
- Absorption of moisture: 0.01%
- Environmental compatibility: harmless to plants, soil, air, and water micro-organisms, groundwater neutral
- Solubility: Resistant to acids and solutions (salt, Ammonia, acid rain, etc.) as well as alcohol.

Guaranteed resistance to pressure of the surface: 12 US Tons/ft² || 120 mt/m²

Delivery form: 12 pieces per sheet ("layer" on pallet)
Installation speed: up to 1000 ft²/hour/man (100 m²)

Ground Preparation: (generic, not site-specific): **Depends upon site condition: LOCAL conditions and usage will prevail.**




- Drainage - if required:** Construct a drainage layer using 5/8" - 1.5" clean, angular gravel (5mm-38mm diameter)
Depth of this layer will depend upon the local soil type, ground condition and climate. From 2 - 24" depth (5-61 cm)
 - Base:** Introduce an equalizing (leveling) layer of 5/8"-3/4" size clean/washed, angular gravel. Depth of this layer should be a minimum of 2-4 inches (5 to 10 cm)
Gravel/sandy soil mix (60/40) is used for grass applications
- Lay out the pre-assembled 12-piece layers of grids, snap them together and consolidate by tamping with plate vibrator or heavy cylinder.
- For backfill, an angular or round medium may be used.
 - Fill the open cells with 5/8" diameter or smaller clean, washed gravel.

Installation:

Backfill:

Finished Surface:

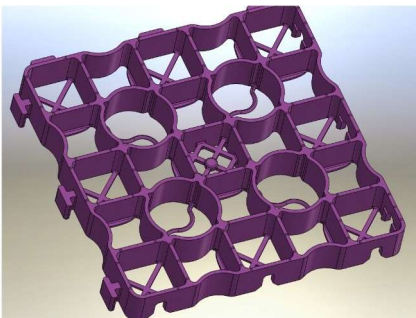

****an overfill is typically recommended for most animal use****

For the overfill/top cover, a rounded clean stone ("p-gravel," "coarse grit" or "buckshot") and/or clean sand may be used.
The size of the backfill medium should be sufficient to preserve drainage (sufficient void space), and to resist migration (due to wind or water), while remaining small enough to provide cushion and to work easily with hand tools.

Delivery: VersiGrid™/L/D1.0

Pallet= 1080 ft² (10034m²) = 90 layers (1 layer= 12 pieces) = 1080 pieces/Pallet

Pack dimensions

Dimensions of pallet : = 37 x 49 x 96 inches (93.98 x 124.46 x 243 .84 cm)

Approx Weight/ pallet : = 1100 lbs/pallet (499 kg/pallet)

Contents of Container : = varies per carrier (20 or more pallets/load typ.)

Reprint and Copyright:

2018 Copyright ECO-TERR Distributing, Inc. All Rights Reserved.

This document may be reproduced by the customers, clients and partners of ECO - TERR Distributing Inc. This copyright Information must remain on all reproduced copies.